

# StrapPack<sup>®</sup>

Automatic Strapping Machine



RQ-8



# RQ-8

## High-Performance Automatic Strapping Machine

### ■ Amazing Strapping Speed

1.5 seconds per strapping cycle – That's 40 straps per minute!

### ■ Self-Correcting Technology

Unique self-correcting mechanisms are built into the RQ-8 operation. If the RQ-8 is operated accidentally without a package on the table, the strap will form a small loop which will be automatically ejected from the sealing unit leaving the machine ready for the next cycle.

### ■ Easy Strap Loading

Newly developed loading system free of complicated devices makes strap threading almost completely automatic – it's just a touch of a lever.

### ■ Permanently Lubricated Mechanisms

Strapack's self-lubricating design has an unsurpassed reputation for its durability and maintenance-free operation.

### ■ Quick Heater

Ready to operate in less than 25 seconds. Designed to insure high seal joint.

### ■ Self-diagnostic

A programmable microprocessor constantly monitors critical functions. Any irregularity sensed is immediately displayed.

### ■ Portable


Heavy-duty metal casters allow for the machine to be quickly installed or moved to any Single Phase power supply outlet.

### ■ Variable Tension

A wide range of tension is available to the operator by use of a single tension dial. Tension capability up to 80kg (equivalent to 150mm stroke).

### ■ Dependable

Strapack's advanced bandway design assures perfect strap placement and eliminates any twisted straps.

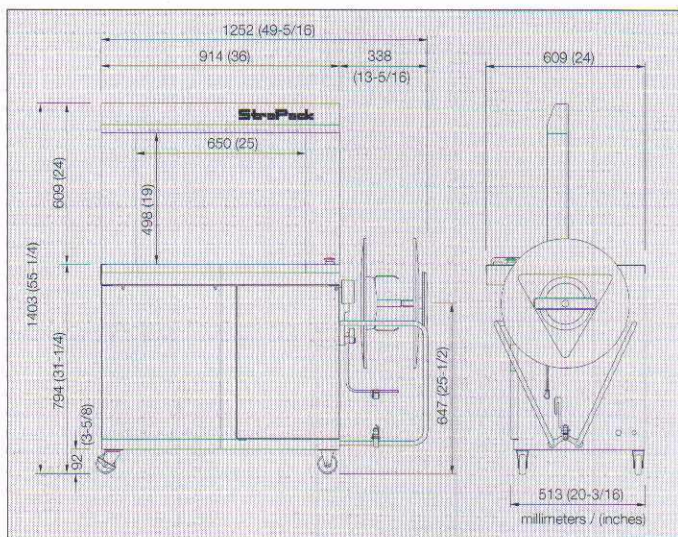

### ■ Arch Size Chart

Size in mm/(inches)  $\textcircled{S}$  standard size

H	W	650 (25)	850 (33)	1050 (41)	1250 (49)	1450 (57)
400 (15)						
500 (19)		$\textcircled{S}$				
600 (23)						
800 (31)						
1000 (39)						

\*Availability of arch sizes may be limited depending on strap width.

### ■ Standard Specifications

Dimensions	Width	1252mm	49-5/16 in.
	Height	1403mm	55-1/4 in.
	Depth	609mm	24 in.
	Weight	160kg	353 lbs.
Table Height		794mm	31-1/4 in.
Arch Size		W 650 × H 500mm	W 25 × H 19 in.
Package Size	Max	W 620 × H 480mm	W 24-7/16 × H 18-7/8 in.
	Min	W 80 × H 30mm	W 3-1/8 × H 1-1/4 in.
Joint / Strap / Coil		heat seal / polypropylene / ID 200 × OD 450 × W 200mm	heat seal / polypropylene / ID 8 × OD 18 × W 8 in.
Strap Width		5, 6, 9, 12, 15.5mm	1/4, 3/8, 1/2, 5/8 in.
Strap Tension		up to 80kg stroke 150mm	up to 176 lbs. stroke 5-7/8 in.
Speed		1.5 sec. / strap, 40 straps per min.	
Power Supply		100, 120, 200, 220, 230, 240V single phase 50 / 60Hz 0.65KVA	

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 1998 Strapack Corporation

### DISTRIBUTED BY:

### STRAPACK CORPORATION

1-2-17, Higashi Shinbashi, Minato-ku, Tokyo 105-0021, JAPAN  
Phone 81-3-3289-1161 Fax. 81-3-3289-1160  
(URL) <http://www.strapack.com>  
(E-mail) [info@strapack.com](mailto:info@strapack.com)

### STRAPACK INC. (HEAD OFFICE)

30860 San Clemente St. Hayward, CA 94544 U.S.A.  
Phone 1-510-475-6000 Fax. 1-510-475-6090